

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 05-052240

(43)Date of publication of application : 02.03.1993

(51)Int.Cl.

F16H 1/38
B60K 23/04

(21)Application number : 03-208191

(71)Applicant : KUBOTA CORP

(22)Date of filing : 20.08.1991


(72)Inventor : UMEMOTO TOMEIO
IKEDA ISAO

(54) AXLE DRIVING DEVICE FOR TRACTOR

(57)Abstract:

PURPOSE: To prevent the loosening of the brake application tightness by preventing the outward slip-off in the axial direction of a differential gear output shaft.

CONSTITUTION: The axle driving device of a tractor is equipped with a brake device 4 and a final deceleration device 5 between the differential gear output shaft 3 of a differential gear device and an axle 31. In this case, the interval T between a stop ring 25 for positioning in the axial direction of a friction plate 23 of the brake device 4 installed on the differential gear output shaft 3 is set larger than the outward shift length in the axial direction of the differential gear output shaft 3.

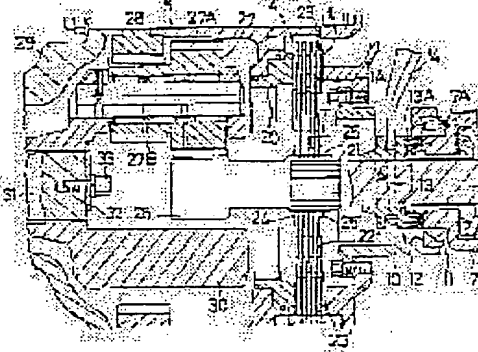

LEGAL STATUS

[Date of request for examination] 23.03.1995

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number] 2628809

[Date of registration] 18.04.1997

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office